



DORFIT
Designer Hardwares


INSTALLATION GUIDE

3D Adjustable Concealed Hinge Installation

● Hinge Adjusting method

Slightly loosen the fixing screws;


Fasten Screws after adjusted.

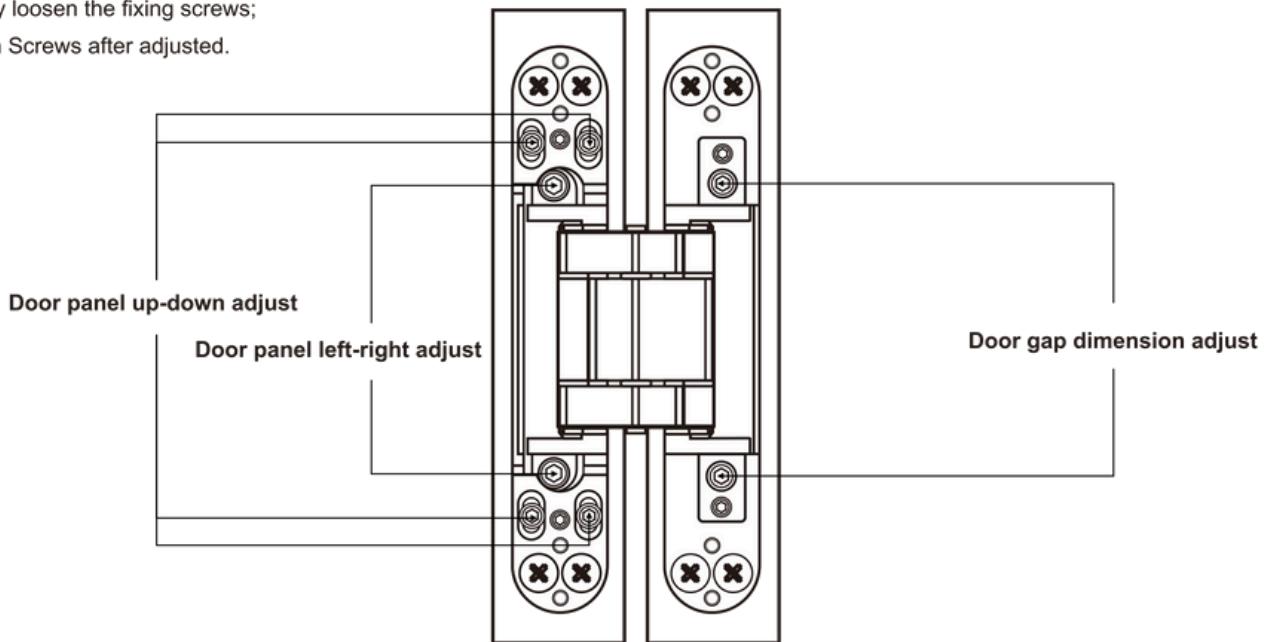


● Adjustable Range

Adjust Model	Door panel up-down adjust	Door panel left-right adjust	Door gap dimension adjust
DTCH008ZA3D40	±2.5mm	±1.5mm	±2mm
DTCH008ZA3D80	±3mm	±1.5mm	±2mm
DTCH008ZA3D120	±3mm	±1.5mm	±2.5mm


● Accessories

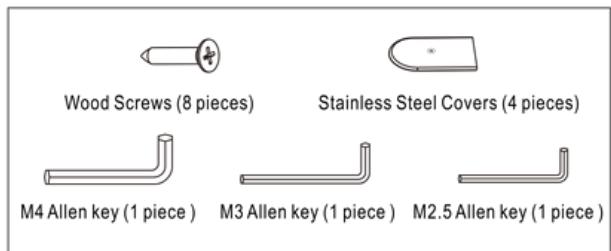


● Installation Instruction

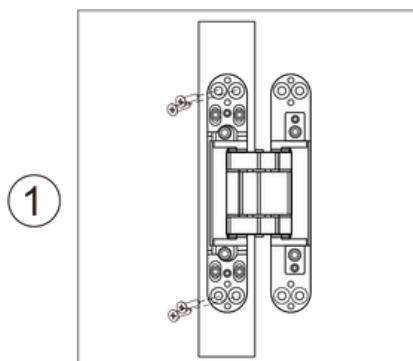

Put the hinge of frame end into the slotted door frame, to tighten with 4 pieces of 5mm wooden tapping screws.

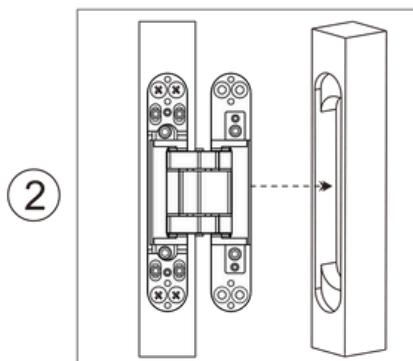

Put the hinge of door end into the slotted wooden door, Loosen the upper locking screws slightly if necessary, To adjust the height, to tighten with 4 pieces 5mm wooden tapping screws;

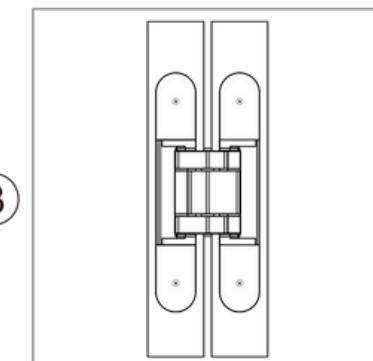

Fix the hinge of frame end and the door end, adjust the appropriate dimension, and finally tighten decorated cover plate.

Double-check the fastening of all clamping and fixing screws after installation.

Quality Incomparable